



# INBOARD/OUTBOARD BATTERY ISOLATORS

Battery isolators are solid-state devices which allow electrical current to flow in one direction only, thus permitting the alternator to be connected directly to two batteries without fear of one higher charged battery discharging into the lower charged battery. Both batteries are always being charged automatically, in proportion, to their needs, whenever the engine is running. When battery isolators are used in conjunction with selector switches, it is not necessary to change the switch position to provide for charging of both batteries. Isolators provide proportioning of the output or charging current on the alternator to the batteries as required, regardless of switch position. Rated for use with 10 to 350 amp alternators on 12, 24, or 32 volt negative ground systems.

**Note** *Battery Isolators cannot be used on 12 volt charging systems with 24 volt trolling motors or newer outboard engines with rectifier-regulator charging systems.*

## BI-0702

1 Alternator, 2 Batteries  
70 AMP max



## BI-1202-3A

1 Alternator,  
2 Batteries  
120 AMP max  
Includes: Exciter Terminal



## BI-0702-4

1 Alternator, 2 Batteries  
70 AMP max  
Includes: Regulator  
sensing terminal




## BI-1203

1 Alternator,  
3 Batteries  
120 AMP max



## BI-0703

1 Alternator, 3 Batteries  
70 AMP max



## BI-1203-3A

1 Alternator,  
3 Batteries  
120 AMP max  
Includes Exciter Terminal



## BI-1202

1 Alternator,  
2 Batteries  
120 AMP max



## BI-1602

1 Alternator,  
2 Batteries  
160 AMP max



© ARCO STARTING & CHARGING SPECIALISTS

TOLL FREE 800-722-2720 • PHONE: 850-455-5476 • FAX: 850-453-2630 • WWW.ARCOMARINE.COM


# INBOARD/OUTBOARD BATTERY ISOLATORS



*Note* Battery Isolators cannot be used on 12 volt charging systems with 24 volt trolling motors or newer outboard engines with rectifier-regulator charging systems.


## BI-1603

1 Alternator,  
3 Batteries  
160 AMP max

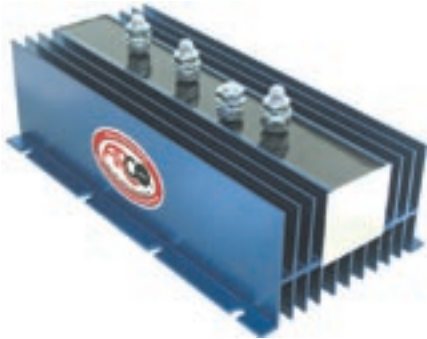


## BI-3202

2 Alternators,  
2 Batteries  
120 AMP max

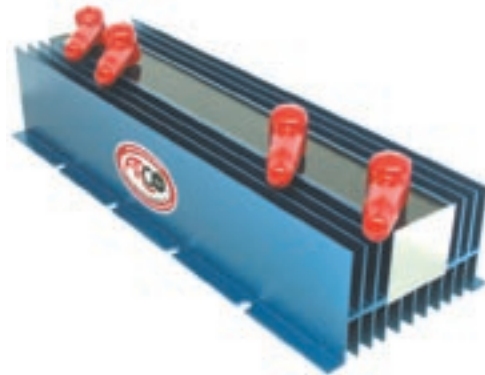

## BI-2702

2 Alternators,  
2 Batteries  
70 AMP max

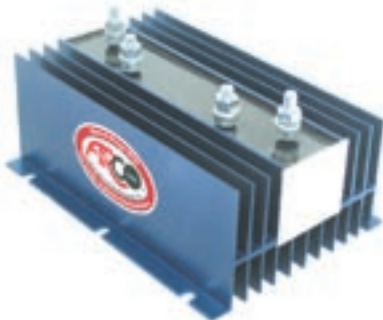

## BI-3203

2 Alternators,  
3 Batteries  
120 AMP max



## BI-2703

2 Alternators,  
3 Batteries  
70 AMP max



## BI-2703-4

2 Alternators,  
3 Batteries  
70 AMP max  
Includes: Regulator  
sensing terminal



Need a technical  
question answered?

**Call 1-800-722-2720**

Monday - Thursday  
7:00 a.m - 5:30 p.m.  
central time.